



STEELBOY PVT. LTD.

AN ISO 9001:2015 CERTIFIED COMPANY



COMPANY & PRODUCT CATALOGUE

Tractor-Mounted Agricultural Implements

Rotavators • Super Seeders • Reversible Ploughs

Chisel Ploughs • Laser Land Levellers

Dera Bassi (Mohali), Punjab, India

दमदार पहचान

ABOUT US

Built on quality. Trusted by farmers.

Steelboy Pvt. Ltd. is an ISO 9001:2015 certified manufacturer based in Dera Bassi, Punjab, producing heavy-duty tractor-mounted agricultural implements for Indian farmers.

From the very beginning, Steelboy has placed quality at the core of its operations. Every process is guided by a strong **Quality Management System (QMS)**, enabling the company to consistently deliver products that meet international benchmarks. This commitment has given Steelboy a competitive edge and earned the long-standing trust of its customers.

The manufacturing facility is equipped with **state-of-the-art machinery and modern testing equipment** — including CNC laser cutting and precision machining — allowing agricultural parts to be produced with exceptional precision and durability. From sourcing raw materials to final inspection, robust checks ensure that every product leaving the plant reflects the reliability and performance customers expect.

Steelboy is equally committed to **continuous improvement**. Processes across production, commercial operations and allied functions are regularly reviewed using feedback and performance audits, so standards are not only maintained but raised year after year.

The objective remains clear: to achieve and sustain customer satisfaction through **consistent quality, ethical practices and timely delivery** — supporting India's agricultural sector with products that truly make a difference.

COMPANY AT A GLANCE

Legal name	Steelboy Private Limited
Brand	STEELBOY® — “दमदार पहचान”
Incorporated	05 February 2020
CIN	U27300PB2020PTC050738
Company type	Private Limited Company (RoC Punjab)
Directors	Ashok Kumar, Gopal Krishan, Kanta Rani
Certification	ISO 9001:2015 (Otabu Certification)
MSME	Udyam registered
Email	info@steelboy.co.in
Location	Village Saidpura, Dera Bassi, Mohali, Punjab 140507

PRODUCT CATEGORIES

Rotavators

Rotary Tillers

Super Seeders

Hydraulic Reversible Ploughs

Chisel Ploughs

Laser Land Levellers

Quality Assurance

At Steelboy, quality is more than a process — it is a promise. A strict Quality Management System ensures every product meets international standards of performance and reliability. With modern machinery and advanced testing systems, each step from raw material selection to final inspection is carefully monitored so customers receive products they can trust.



MSME (Udyam) & ISO 9001:2015 certificates

PRODUCT RANGE

Implements for every stage of the field


From primary tillage and deep ploughing to one-pass sowing and precision levelling — Steelboy machines are engineered for Indian soils and tractors from 12 HP to 65 HP.

Product	Models / Sizes	Tractor Power	Key Use	Page
HD Plus Rotavator	8 models · 5 – 9 ft	35 – 65 HP	Extra-heavy-duty tillage	4
HD Rotavator	8 models · 5 – 9 ft	35 – 65 HP	All-round seedbed preparation	5
Mini Series Rotavator	4 models · 2.5 – 4 ft	12 – 30 HP	Orchards, vegetables, small tractors	6
Zyro Series Rotary Tiller	3 models · 5.5 – 7 ft	35 – 55 HP	High-blade-count fine tilth	7
Pahalwan / Pahalwan Plus	4 models · 5 – 6 ft	35 – 50 HP	Paddy special (puddling)	8
Super Seeder	2 models · 7 – 8 ft	50 HP & above	Sowing wheat into paddy stubble	9
Super Seeder – Multicrop	2 models · 7 – 8 ft	50 HP & above	Multi-crop sowing + fertilizer	10
Hydraulic Reversible Plough	3 models · Gujarat model	—	Deep inversion ploughing	11
Chisel Plough (Tota Panja)	2 models · 6 – 7 ft	40 – 60 HP	Deep tillage, hard-pan breaking	12
Aerodynamic Chisel Plough	2 models · 6 – 8 ft	—	Deep tillage, wide frame	13
Laser Land Leveller	7 – 12 ft (extendable)	—	Precision levelling, water saving	14


Rotavators

Super Seeders


Reversible Plough

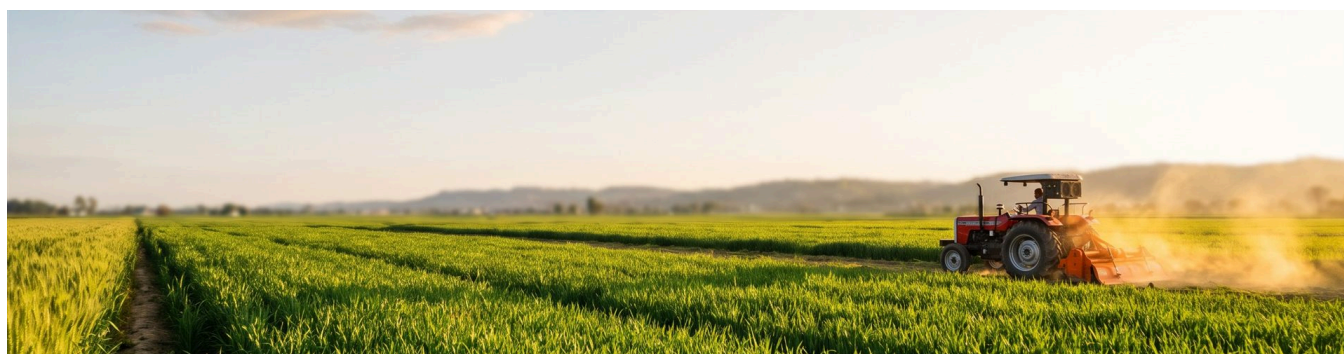Chisel Plough


ROTAVATOR

Steelboy HD Plus Rotavator

Extra-heavy-duty multi-speed rotavator · 5 ft to 9 ft · For 35 – 65 HP tractors



Heavy Shockers



Gear Box



Side Gear & Stand



Heavy Hitch



Boron Steel Blade



Heavy Duty Disc

FEATURES

- CNC laser cut high precision parts
- Heavy duty gear box
- High quality boron steel blades
- Strong tubular frame
- Dual cone mechanical oil seals
- Flexible spring loaded trailing assembly
- Durable powder coated finish
- Side gear drive 20:35:28

SPECIFICATIONS

Model	Working width (cm)	Gear Box	Crown-Pinion	No. of Blades	Tractor Power (HP)	Side Gear	Weight (approx)
SR536 – 5 ft	150	Multi	13:23	36 L/C	35 – 40	20:35:28	450 kg
SR539 – 5.5 ft	165	Multi	13:23	39 L/C	35 – 40	20:35:28	470 kg
SR642 – 6 ft	175	Multi	13:23	42 L/C	40 – 45	20:35:28	490 kg
SR648 – 6 ft	175	Multi	13:23	48 L/C	40 – 45	20:35:28	500 kg
SR748 – 7 ft	200	Multi	13:23	48 L/C	45 – 50	20:35:28	540 kg
SR754 – 7 ft	200	Multi	13:23	54 L/C	45 – 50	20:35:28	550 kg
SR854 – 8 ft	225	Multi	13:23	54 L/C	55 – 60	20:35:28	590 kg
SR960 – 9 ft	259	Multi	13:23	60 L/C	60 – 65	20:35:28	610 kg

All specifications are subject to change without prior notice due to improvement of design and products. Weights are approximate, without PTO shaft.

ROTAVATOR

Steelboy HD Rotavator

Versatile heavy-duty multi-speed rotavator · 5 ft to 9 ft · For 35 – 65 HP tractors



FEATURES

- CNC laser cut high precision parts
- Heavy duty gear box
- High quality boron steel blades
- Strong tubular frame
- Dual cone mechanical oil seals
- Flexible spring loaded trailing assembly
- Durable powder coated finish
- Side gear drive 20:35:28

SPECIFICATIONS

Model	Working width (cm)	Gear Box	Crown-Pinion	No. of Blades	Tractor Power (HP)	Side Gear	Weight (approx)
SR536 – 5 ft	150	Multi	13:23 / 11:22	36 L/C	35 – 40	20:35:28	390 kg
SR539 – 5.5 ft	165	Multi	13:23 / 11:22	39 L/C	35 – 40	20:35:28	415 kg
SR642 – 6 ft	175	Multi	13:23 / 11:22	42 L/C	40 – 45	20:35:28	440 kg
SR648 – 6 ft	175	Multi	13:23 / 11:22	48 L/C	40 – 45	20:35:28	450 kg
SR748 – 7 ft	200	Multi	13:23 / 11:22	48 L/C	45 – 50	20:35:28	480 kg
SR754 – 7 ft	200	Multi	13:23 / 11:22	54 L/C	45 – 50	20:35:28	490 kg
SR854 – 8 ft	225	Multi	13:23 / 11:22	54 L/C	55 – 60	20:35:28	520 kg
SR960 – 9 ft	259	Multi	13:23 / 11:22	60 L/C	60 – 65	20:35:28	550 kg

All specifications are subject to change without prior notice due to improvement of design and products. Weights are approximate, without PTO shaft.

ROTAVATOR

Steelboy Mini Series Rotavator

Compact single-speed rotavator · 2.5 ft to 4 ft · For 12 – 30 HP tractors, orchards, vineyards and vegetable farms



FEATURES

- CNC laser cut high precision parts
- High quality single-speed gear box
- High quality boron steel blades
- Strong tubular frame
- Dual cone mechanical oil seals
- Flexible spring loaded trailing assembly
- Durable powder coated finish
- Side gear drive 20:35:28

SPECIFICATIONS

Model	Working width (cm)	Gear Box	Crown-Pinion	No. of Blades	Tractor Power (HP)	Side Gear	Weight (approx)
SR216 – 2.5 ft	70	Single	11:22	16 L/C	12 – 15	20:35:28	180 kg
SR320 – 3 ft	100	Single	11:22	20 L/C	15 – 18	20:35:28	200 kg
SR324 – 3.5 ft	110	Single	11:22	24 L/C	18 – 25	20:35:28	220 kg
SR428 – 4 ft	115	Single	11:22	28/30 L/C	25 – 30	20:35:28	240 kg

All specifications are subject to change without prior notice due to improvement of design and products. Weights are approximate, without PTO shaft.

NEW · ROTARY TILLER

Steelboy Zyro Series Rotary Tiller

High-blade-count rotary tiller with multi-speed gearbox · 5.5 ft to 7 ft · More blades per foot for a finer, well-pulverised seedbed in fewer passes.



Representative field image

WHY ZYRO

- 48 to 60 L/C blades for fine tilth
- Multi-speed heavy-duty gear box
- Boron steel blades, long wear life
- Dual cone mechanical oil seals
- Strong tubular frame
- Powder coated finish

IDEAL FOR

- Seedbed preparation after harvest
- Mixing crop residue into soil
- Medium to heavy soils
- 35 – 55 HP tractors

SPECIFICATIONS

Model	Working width (cm)	Gear Box	Oil Seal	No. of Blades	Tractor Power (HP)	Side Gear	Weight (approx)
SR548 – 5.5 ft	165	Multi	Dual cone	48 L/C	35 – 40	20:35:28	420 kg
SR654 – 6 ft	175	Multi	Dual cone	54 L/C	40 – 45	20:35:28	440 kg
SR760 – 7 ft	200	Multi	Dual cone	60 L/C	50 – 55	20:35:28	480 kg

All specifications are subject to change without prior notice due to improvement of design and products. Weights are approximate, without PTO shaft.

PADDY SPECIAL

Steelboy Pahalwan Series

Rugged rotavators (5 ft to 6 ft) built for wet-land paddy puddling — “Pahalwan” (पहलवान) means wrestler, a nod to their strength.

PAHALWAN PLUS ROTAVATOR TILLER



PAHALWAN ROTAVATOR



PAHALWAN PLUS — SPECIFICATIONS

Model	Working width (cm)	Gear Box	Crown-Pinion	No. of Blades	Tractor Power (HP)	Side Gear	Weight (approx)
SR654 – 6 ft	175	Multi	11:22	54 L/C	45 – 50	20:35:28	415 kg

PAHALWAN — SPECIFICATIONS

Model	Working width (cm)	Gear Box	Crown-Pinion	No. of Blades	Tractor Power (HP)	Side Gear	Weight (approx)
SR536 – 5 ft	150	Multi	11:22	36 L/C	35 – 40	20:35:28	380 kg
SR642 – 6 ft	175	Multi	11:22	42 L/C	40 – 45	20:35:28	400 kg
SR648 – 6 ft	175	Multi	11:22	48 L/C	40 – 50	20:35:28	410 kg

WHY PAHALWAN FOR PADDY

- Multi-speed gearbox for puddling & dry tillage
- Gear-drive side transmission (20:35:28)
- Boron steel L/C blades for long life
- Powder-coated body resists water & mud
- Dual cone mechanical oil seals
- Strong tubular frame

All specifications are subject to change without prior notice due to improvement of design and products. Weights are approximate, without PTO shaft.

RESIDUE MANAGEMENT

Steelboy Super Seeder


Sows wheat directly into standing paddy stubble in a single pass — cutting, mixing residue into the soil and seeding at once, eliminating the need for stubble burning.




Gear Box



Boron Steel Blade




Heavy Duty Disc



Seed Drill Feeder



Discs



Seeding Mechanism

FEATURES

- CNC laser cut high precision parts
- Heavy duty gear box
- High quality boron steel blades (LJF)
- Strong tubular frame
- Dual cone mechanical oil seals
- Flexible spring loaded trailing assembly
- Seed drill feeder with disc openers
- Durable powder coated finish

SPECIFICATIONS

Model	Working width (cm)	Gear Box	Crown-Pinion	No. of Blades	Tractor Power (HP)	Side Gear	Weight (approx)
SS54 – 7 ft	200	Multi	13:23	54 LJF (12 Tynes)	50 & above	20:35:28	1000 kg
SS60 – 8 ft	225	Multi	13:23	54 LJF (13 Tynes)	55 & above	20:35:28	1050 kg

All specifications are subject to change without prior notice due to improvement of design and products. Weights are approximate, without PTO shaft.

MULTICROP

Super Seeder with Multicrop Attachment

Separate seed & fertilizer boxes and a multicrop metering system — for wheat and other crops with adjustable seed rates.



Also available in green livery




Gear Box



Boron Steel Blade




Heavy Duty Disc



Seed Drill Feeder



Discs



Seeding Mechanism

FEATURES

- CNC laser cut high precision parts
- Heavy duty gear box
- High quality boron steel blades
- Strong tubular frame
- Dual cone mechanical oil seals
- Flexible spring loaded trailing assembly
- Seed + fertilizer dual-box metering
- Durable powder coated finish

SPECIFICATIONS

Model	Working width (cm)	Gear Box	Crown-Pinion	No. of Blades	Tractor Power (HP)	Side Gear	Weight (approx)
Multicrop – 7 ft	200	Multi	13:23	54 LJF (12 Tynes)	50 & above	20:35:28	1000 kg
Multicrop – 8 ft	225	Multi	13:23	54 LJF (13 Tynes)	55 & above	20:35:28	1050 kg

All specifications are subject to change without prior notice due to improvement of design and products. Weights are approximate, without PTO shaft.

NEW · PRIMARY TILLAGE

Steelboy Hydraulic Reversible Plough

Gujarat model · Two-way mouldboard plough that flips hydraulically at the end of each run — turning every furrow the same way for level fields, no dead furrows and faster work.



FEATURES

- Hydraulic 180° reversing mechanism
- Heavy box-section main frame
- 8 – 10 mm mouldboards
- Round tines, 32 – 35 mm thick
- Heavy shaft with taper roller bearings
- Up to 25 inch working depth
- Powder coated finish

SPECIFICATIONS

Specification	Model 1	Model 2	Model 3
Overall height	51 – 55 inch	51 – 55 inch	51 – 55 inch
Main frame	100 × 25 mm	110 × 32 mm	125 × 32 mm
Working width	25 inch	25 inch	25 inch
Mould board thickness	8 mm	8 mm	10 mm
Tines shape	Round	Round	Round
Tines thickness	32 mm	32 mm	35 mm
Distance between tines	10 inch	10 inch	11 inch
Share thickness	11 mm	11 mm	11 mm
Working depth	25 inch	25 inch	25 inch
Shaft thickness	90 mm	100 mm	100 mm
Shaft length	600 mm	600 mm	600 mm
Bearing size	33017	33019	33019
Weight (approx)	420 kg	450 kg	500 kg

All specifications are subject to change without prior notice due to improvement of design and products.

DEEP TILLAGE

Steelboy Chisel Plough (Tota Panja)

A heavy tyne implement that breaks hard-pan and compacted sub-soil to a depth of 12–15 inches, improving water infiltration, aeration and root growth.



HIGHLIGHTS

- Rigid box-section main frame, 5 mm
- 34 mm thick heavy-duty tynes
- Replaceable reversible points (shovels)
- Working depth 12 to 15 inch
- Heavy 3-point linkage hitch
- Breaks hard-pan, improves drainage

SPECIFICATIONS

Model	SCH-335	SCH-440
Frame size	6 ft	7 ft
Frame thickness	5 mm	5 mm
No. of tynes	5	7
Tyne thickness	34 mm	34 mm
Working depth	12 – 15 inch	12 – 15 inch
Weight (approx)	335 kg	440 kg
Power requirement	40 – 45 HP	50 – 60 HP

NEW · DEEP TILLAGE

Steelboy Aerodynamic Model Chisel Plough

Tota Panja with a wide, streamlined box-frame design — 6 ft to 8 ft · Built for deep sub-soiling with smooth soil flow around the tynes and stable pulling.



HIGHLIGHTS

- Aerodynamic wide box frame, 5 mm
- 34 mm thick heavy-duty tynes
- Replaceable reversible shovels
- Up to 8 ft frame for larger tractors
- Heavy 3-point linkage hitch
- Breaks hard-pan, improves drainage

SPECIFICATIONS

Model	SCHAER-350	SCHAER-440
Frame size	6 ft	8 ft
Frame thickness	5 mm	5 mm
No. of tynes	5	7
Tyne thickness	34 mm	34 mm
Working depth	12 – 15 inch	12 – 15 inch
Weight (approx)	350 kg	450 kg



PRECISION GRADING

Steelboy Laser Land Leveller

Precision grading, maximum efficiency. Works with the USA-made Alpha XD rotary laser — long range and accurate, with single & double slope capability.


BENEFITS

- Saves irrigation water up to 20–25%
- Reduces weeds in the field
- Increases yield & grain quality — higher farm income
- Helps increase productivity
- Saves fuel / electricity used in irrigation
- Saves labour cost

LEVELLER BUCKET

Working width	7, 8, 9 ft
Side plate	10 mm
Scraping blade	125 × 12 mm
Hydraulic cylinder capacity	2 ton
Bucket height	645 mm
Bucket width	2134 mm
Weight	800 kg (approx)

EXTEND SYSTEM

Hydraulically extendable bucket — one machine covers a range of widths.

7 ft → 9 ft	8 ft → 10 ft
9 ft → 11 ft	10 ft → 12 ft

Also includes: high-quality hydraulic jack · 4 heavy-duty wheels · durable build, easy to attach & operate



LASER CONTROL SYSTEM

Laser System Specifications

Transmitter, receiver and control panel supplied with the Steelboy Laser Land Leveller.

ALPHA XD ROTARY LASER TRANSMITTER • MADE IN USA

Operating range	1300 m diameter
Levelling accuracy	±10 arc sec (0.060" @ 100 ft) (1.5 mm)
Levelling technology	Servo motor
Levelling range	±5°
Slope matching range	Single axis, X axis self levels, 8%
Height alert	Normally active, can be disabled
Rotation coverage / speed	360°, 600 / 1200 rpm (nominal)
Machine control compatible	Yes
Power supply	4 C Alkaline or NiMH rechargeable
Run time	115 h (Alkaline) / 65 h (NiMH)
Automatic shut-off	12 minutes out of level
Environmental	Dust & water resistant (IP65)
Laser rating	CDRH Class IIIa / IEC Class 3R

LASER RECEIVER MEI 367 SB

Voltage range	12 VDC ±20%
Max current consumption	500 mA
Laser requirement	All rotating lasers (HeNe or IR)
Water resistant	IP68
Pulsed display	10 pulses per second
Protection	Reverse polarity
Communication	Wired to control box
No. of wire pins	4

CONTROL PANEL PRO-BOX

Voltage range	12 VDC ±20%
System accuracy	±2 mm (standard deviation)
Hydraulic o/p setting	Directional valves (01)
Water resistant	IP65
Working mode	Auto / Manual
Blade control	3 functions
Laser out of range	Indicator





GET IN TOUCH

Steelboy Pvt. Ltd.

MANUFACTURER / CORPORATE OFFICE

Lane No. 2, Behind Nector Lifescience,
Barwala Road, Village Saidpura,
Dera Bassi, Distt. Mohali,
Punjab 140507, India

PHONE

+91 70872 04143
+91 70872 04145
+91 99151 15072
+91 99151 15687 · +91 99151 19910

EMAIL

info@steelboy.co.in
steelboypvtltd08@gmail.com
marketing.steelboy@gmail.com

ONLINE

Website: www.steelboy.co.in
Facebook: facebook.com/steelboypvtltd
Instagram: instagram.com/steelboypvt.ltd
YouTube: youtube.com/@STEELBOY-tb3ys

DISTRIBUTOR / DEALER



ISO 9001:2015 Certified · Udyam (MSME) Registered